



新雅冷柜 服务全球
XINYA REFRIGERATOR SERVES THE WORLD

专注制冷行业30年

FOCUS ON REFRIGERATION INDUSTRY FOR 30 YEARS

广东新雅酒店设备制造有限公司
GUANGDONG XINYA HOTEL EQUIPMENT CO.,LTD

广东新雅酒店设备制造有限公司

GUANGDONG XINYA HOTEL EQUIPMENT CO.,LTD

地址:广东省中山市板芙镇板芙北路 148 号

Address:No. 148, Banfu North Road,
Banfu Town, Zhongshan City,
Guangdong ,PRC

电话:+86-760-8652 0856

Tel:+86-760-8652 0856

传真:+86-760-8652 0303

Fax:+86-760-8652 0303

电子邮箱: info@xinyachina.com.cn

E-mail:info@xinyachina.com.cn

网址: <http://www.xinyachina.com.cn>

URL:<http://www.xinyachina.com.cn>

脸书: [facebook.com/xinyachina](https://www.facebook.com/xinyachina)

Facebook: [facebook.com/xinyachina](https://www.facebook.com/xinyachina)



COMPANY PROFILE

企业简介

广东新雅酒店设备制造有限公司精工制造不锈钢商用冷柜和展示柜,定位中高端。公司技术力量雄厚,配有AMADA数控冲床,数控折弯机等先进生产设备和工况实验室等质量检测系统。

优良的品质和卓越的性能,使新雅产品遍及中国内资外资连锁店,麦当劳,宜家等,并远销海外多个市场。

Guangdong Xinya Hotel Equipment Co.,Ltd is a professional manufacturer which specializes in refrigeration equipment. We possess advanced production facilities, like AMADA punching machines, Bending machines and testing equipment.

Our high quality refrigerators are supplied to domestic chain restaurants, like McDonalds, IKEA, etc., and exported to many overseas markets.



设计研发

优秀的年轻团队
具备多年的设计经验
不断的向外学习积累
多次引进优秀人才



制造生产

先进的机器和设备
严苛的生产制度及标准
完善的生产流程
通过多项国内外品质认证



产品应用

连续多年增涨的销售数量
与国内外多家企业长期合作
产品多样应用范围广
正不断拓展新的应用领域

DEVELOPMENT HISTORY

发展历程

平稳阶段

1991

本公司以中港合资形式创立

Founded as China-Hongkong Joint Venture.

1991-2004

以老客户为服务重点, 建立深厚的合作关系, 积累技术经验

Maintained strong business relationship with old customers and accumulated technical experience.

2000

广东省质检局突击抽检冷柜行业, 被公开表扬为当时唯一各项质量技术指标全部合格之企业, 并邀请我公司为广东省质量协会会员。长期以来同业都在低端产品进行价格竞争, 而我司三十年来都是把产品, 技术放在第一位, 不追求薄利多销。

Praised publicly in a surprise inspection by Guangdong Quality Bureau, we are the only manufacturer who passed the full list of technical requirement checking. Being different with other low cost producers, we have been focus on quality and reliability for 30 years.

2005

公司首次参加广交会, 获得第一个国外长期客户, 至今一直紧密合作。

First time to attend Canton Fair and win the first foreign customer who cooperates with us until now.

产品通过MEPS认证。

Attained the MEPS certification.

2009

本公司跨过金融风暴, 进行人事改革, 加大投资引入了先进数控机械生产设备, 以提升质量。

Reformed proactively after Financial Crisis and invested heavily to introduce advanced numerical control machinery for higher quality.

双温蛋糕展示柜(通过NSF认证, OEM) 荣获全国麦当劳McCafe采购商一致采购, 一直至今。

Our dual temperature cake showcase (certified by NSF, OEM) won the sole procurement in all McCafe McDonald in China until now.

创新发展阶段

2010

全力开拓国际业务, 积极参与展览会, 本年参加广交会, 获得多个长期客户。

Actively explored international market and attended exhibitions. We won many in the Canton Fair.

产品通过CE认证

Our products passed CE certification.

在2010年上海世博会, 本公司荣获美国, 德国和法国三个展馆的全套冷柜设备采购商订单。

Shanghai World Expo, we got OEM orders of full set refrigeration equipment in French, United States and Germany Pavilion.

获得IKEA餐厅国内采购商订单

We won IKEA China procurement order(OEM)

2011

进行股份改革, 引进创新管理人才和资金。

We reformed the shares ownership to attract innovative management and introduce new investors.

参加香港HOFEX展会, 获得香港连锁披萨餐厅Paisano's Pizzeria 全线新店订单。

Attended HOFEX and won the procurement order of the entire chain restaurants of Paisano's Pizzeria Hong Kong.

2012

投入超过五百万, 购入新设备和开设新厂房, 承接更多出口订单。

Invested more than CNY five millions into new plants and equipment to expand export business.

2013

创下产销连续三年复合增长30%的佳绩, 开发更多新产品。

Achieved the record of 30% cumulative sales growth and continued to develop more new products.

参加香港HOFEX和香港餐饮展, 获得连锁甜品店许留山新店订单, 得到众多当地客户支持。

Attended HOFEX and Restaurant & Bar Exhibition Hong Kong 2013, we won the orders of famous dessert chain restaurant XULIUSHAN and the orders of local customers.

引入激光切割设备和先进制冷实验室。

Introduced laser cutting machine and advanced refrigeration laboratory.

2014

正式与马得利全国连锁面包店成为合作伙伴, 所有设备由新雅设计及提供。被评为经贸工作先进单位, 守合同重信用企业。

Xinya founded business partnership with "Medeli", a national wide chain bakery brand in China, Xinya designs and supplies bakery equipments to "Medeli Cake".

Owning to the strong sales and good reputation. Xinya was accredited as "Avant garde" Export and "Trustworthy" manufacture by government authority in 2014.

2015

随着国家[互联网+]战略深化发展, 本公司荣获O2O物联网公司的订单: 合作设计生产[互联网冷柜]。用户手机下单订购新鲜食材, 晚上在家门口的特种多格式[互联网]取货!

In 2015, our refrigerator became a part of "O2O" online to "offline" business. We designed and supplied the "refrigerated lockers" that connects to Internet. Smart phone users order their grocery food and pick up in the refrigerated lockers nearby their home.

开始与上市连锁公司永辉超市初步合作, 迈开商超冷链第一步。

In 2015, Xinya took the first step in commercial supermarket refrigeration, founded business partnership with "Yonghui Supermarket", a listed chain supermarket brand in China

2017

着重开发商超冷链产品单出风岛柜、双出风岛柜、风幕柜、分体冷冻柜等, 并与永辉超市紧密合作

Xinya focused on developing Dual-jet Air Curtain Multidecks-Remote, Island Freezer, Service Counter and so on for supermarket and maintained strong business relationship with Yonghui Supermarket

2019

参加FHV越南食品及酒店用品展会, 调整生产结构以适应市场发展需求

In 2019, we attended FHV exhibition in Vietnam and adjusted production structure to meet the needs of market development.

2022

升级厂房设备, 引进3000W激光切割机和自动剪板机, 生产线的现代化使产能有了质的飞跃, 并创下产销历史新高。

To expand local and export business, we upgraded plant equipment, introduced 3000W laser cutting machine and automatic guillotine shears to modernize production line. We hit a sales record in 2022.

新雅公司拥有年青优秀的团队, 我们重视每一个客户的托付, 超越一般的生产制造, 和客户的新锐要求共同成长!

The Xinya company has more than ordinary manufacturing power that always fulfil the promise to our customer. We will always back up your advancing needs.

Honorary Certification

荣誉认证

恪守初心 方得社会认可

Only by adhering to the original intention
can we win social recognition



CONTENTS 目录

豪华风冷系列
Deluxe ventilated series



P01-02

SU系列
SU series



P03-05



直冷系列
Direct cooling series



P06-07

工程系列
P style series



P08-10

展示柜系列
Display cabinet series



P11

桌面展示柜系列
Desktop display case series



P12-4

巧克力柜
Chocolate cabinet



P15

蛋糕展示柜
Cake display case



P16-22



CONTENTS
目录

冷热柜系列 Hot and cold cabinet series	
P23-25	
速冻柜 Blast freezer	
P26	
冰淇淋柜 Ice cream cabinet	
P27	
解冻柜 Thawing cabinet	
P28	
鲜花柜 Flower showcase	
P29	
定制红酒柜 Custom made wine chiller	
P30	
商超系列 Supermarket series	
P31-35	
红酒柜系列 Wine cooler series	
P36	
制冰机系列 Ice machine series	
P37-38	

DETAILED EXPLANATION OF THE ICONS

图标详解

 Beautiful Rounded Design Of Door Side 门边圆弧设计	 Led Lights LED灯	 High Temperature Alarm 高温报警
 Demist 玻璃除雾	 Movable Coated Shelves 可调层架	 Auto Closing 自动回归
 Large Capacity 超大容积	 Eco-friendly Refrigerant 环保制冷剂	 Inner Air Guide 冷气内循环
 Blower System 风冷系统	 Digital Controller 数字温控	 Stainless Steel 不锈钢材质
 Direct Cooling System 直冷系统	 Rounded Internal Corners 内角圆弧	 High-density Insulation 高密度保温层

豪华风冷系列
Deluxe ventilated series



XGU-500C
XGU-500F



XGU-1090C
XGU-1090F



XGC-12C
XGC-12F
XGC-15C
XGC-15F



XGC-18C
XGC-18F

产品特点/ FEATURES

- 循环风流, 快速制冷, 柜内温度均匀
- 门封内埋电热丝, 减少凝露
- 内胆圆弧角位设计, 可彻底清除食物残渣, 杜绝细菌滋生, 符合卫生标准
- 小于90°角门自动回归
- 高精度电子温控, 液晶数字清晰显示温度
- 无氟环保制冷剂
- Circulating air assures rapid cooling and even temperature
- Heating wire inside door seal to defrost
- Rounded internal corners for hygiene & easy cleaning
- Autoregressive door
- High quality digital controller and independent power switch
- CFC& HCFC free, environmental friendly



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
XGU-500C	625×800×2040mm(H) 625×750×2040mm(H)	500L 436L	2~8°C	421W	R134A	220V~240V/50Hz
XGU-500F	625×800×2040mm(H) 625×750×2040mm(H)	500L 436L	-18°C	624W	R404A	220V~240V/50Hz
XGU-1090C	1250×800×2040mm(H) 1250×750×2040mm(H)	1090L 1000L	2~8°C	530W	R134A	220V~240V/50Hz
XGU-1090F	1250×800×2040mm(H) 1250×750×2040mm(H)	1090L 1000L	-18°C	761W	R404A	220V~240V/50Hz
XGU-1690C	1880×800×2040mm(H) 1880×750×2040mm(H)	1690L 1600L	2~8°C	780W	R134A	220V~240V/50Hz
XGU-1690F	1880×800×2040mm(H) 1880×750×2040mm(H)	1690L 1600L	-18°C	1050W	R404A	220V~240V/50Hz



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
XGC-12C	1200×750×850mm(H) 1200×600×850mm(H)	280L 210L	2~8°C	350W	R134A	220V~240V/50Hz
XGC-12F	1200×750×850mm(H) 1200×600×850mm(H)	280L 210L	-18°C	478W	R404A	220V~240V/50Hz
XGC-15C	1500×750×850mm(H) 1500×600×850mm(H)	385L 290L	2~8°C	350W	R134A	220V~240V/50Hz
XGC-15F	1500×750×850mm(H) 1500×600×850mm(H)	385L 290L	-18°C	478W	R404A	220V~240V/50Hz
XGC-18C	1800×750×850mm(H) 1800×600×850mm(H)	490L 370L	2~8°C	368W	R134A	220V~240V/50Hz
XGC-18F	1800×750×850mm(H) 1800×600×850mm(H)	490L 370L	-18°C	542W	R404A	220V~240V/50Hz

SU系列
SU series



SUC500
SUF500



SUC1000
SUF1000



SUC1500
SUF1500



SUCG500B
SUFG500B



SUCG1000B
SUFG1000B

产品特点/ FEATURES

- 循环风流, 快速制冷, 柜内温度均匀
- 门封内埋电热丝, 减少凝露
- 内胆圆弧角位设计, 可彻底清除食物残渣, 杜绝细菌滋生, 符合卫生标准
- 小于90°角门自动回归
- LED 触摸显示屏
- 无氟环保制冷剂
- Circulating air assures rapid cooling and even temperature
- Heating wire inside door seal to defrost
- Rounded internal corners for hygiene&easy cleaning
- Autoregressive door
- LED touch controller
- CFC& HCFC free, environmental friendly



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
SUC500	620×760×1980mm(H)	500L	2~8°C	475W	R134A	220V~240V/50Hz
SUF500	620×760×1980mm(H)	500L	-18°C	600W	R404A	220V~240V/50Hz
SUC1000	1220×760×1980mm(H)	1000L	2~8°C	706W	R134A	220V~240V/50Hz
SUF1000	1220×760×1980mm(H)	1000L	-18°C	895W	R404A	220V~240V/50Hz
SUC1500	1835×760×1980mm(H)	1500L	2~8°C	936W	R404A	220V~240V/50Hz
SUF1500	1835×760×1980mm(H)	1500L	-18°C	1046W	R404A	220V~240V/50Hz



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
SUCG500B	620×760×1980mm(H)	500L	2~8°C	508W	R134A	220V~240V/50Hz
SUFG500B	620×760×1980mm(H)	500L	-18°C	835W	R404A	220V~240V/50Hz
SUCG1000B	1220×760×1980mm(H)	1000L	2~8°C	815W	R134A	220V~240V/50Hz
SUFG1000B	1220×760×1980mm(H)	1000L	-18°C	1238W	R404A	220V~240V/50Hz



直冷系列
Direct cooling series



SUCG500
SUGF500



SUCG1000
SUGF1000



SUCG1500
SUGF1500



SLLZ4-450
SLLDZ-450



SLLZ4-1000
SLLD4-1000



SLLZ4-1600
SLLD4-1600

产品特点/ FEATURES

- 循环风流, 快速制冷, 柜内温度均匀
- 门封内埋电热丝, 减少凝露
- 内胆圆弧角位设计, 可彻底清除食物残渣, 杜绝细菌滋生, 符合卫生标准
- 小于90°角门自动回归
- LED 触摸显示屏
- 无氟环保制冷剂
- Circulating air assures rapid cooling and even temperature
- Heating wire inside door seal to defrost
- Rounded internal corners for hygiene&easy cleaning
- Autoregressive door
- LED touch controller
- CFC& HCFC free, environmental friendly



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
SUCG500	620×760×1980mm(H)	500L	2~8°C	508W	R134A	220V~240V/50Hz
SUGF500	620×760×1980mm(H)	500L	-18°C	835W	R404A	220V~240V/50Hz
SUCG1000	1220×760×1980mm(H)	1000L	2~8°C	815W	R134A	220V~240V/50Hz
SUGF1000	1220×760×1980mm(H)	1000L	-18°C	1238W	R404A	220V~240V/50Hz
SUCG1500	1835×760×1980mm(H)	1500L	2~8°C	1080W	R404A	220V~240V/50Hz
SUGF1500	1835×760×1980mm(H)	1500L	-18°C	1705W	R404A	220V~240V/50Hz

产品特点/ FEATURES

- 全不锈钢造型, 外形美观, 永不生锈
- 进口压缩机, 高效制冷系统;
- 内置蒸发铜管, 防霉防菌, 节能省电
- 可拆卸式门封, 拆洗方便
- 高精度电子温控, 液晶数字清晰显示温度
- 无氟环保制冷剂
- All stainless steel construction
- European compressor and efficient refrigeration unit
- Internalized copper tube, fungi-proofing and energy-saving
- Removable door seal for easier cleaning
- High quality digital controller and independent power switch
- CFC& HCFC free, environmental friendly



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
SLLZ4-450	625×750×1920mm(H)	450L	2~8°C	341W	R134A	220V~240V/50Hz
SLLD4-450	625×750×1920mm(H)	450L	-18°C	524W	R404A	220V~240V/50Hz
SLLZ4-1000	1250×750×1920mm(H)	1000L	2~8°C	450W	R134A	220V~240V/50Hz
SLLD4-1000	1250×750×1920mm(H)	1000L	-18°C	651W	R404A	220V~240V/50Hz
SLLZ4-1600	1880×750×1920mm(H)	1600L	2~8°C	700W	R134A	220V~240V/50Hz
SLLD4-1600	1880×750×1920mm(H)	1600L	-18°C	940W	R404A	220V~240V/50Hz



SLLZ4-1200
SLLD4-1200
SLLZ4-1500
SLLD4-1500



OPTIONAL BACKSPLASH
台面可选配带背



SLLZ4-1800
SLLD4-1800

产品特点/ FEATURES

- 全不锈钢造型, 外形美观, 永不生锈
- 进口压缩机, 高效制冷系统;
- 内置蒸发铜管, 防腐抗菌, 节能省电
- 可拆卸式门封, 拆洗方便
- 高精度电子温控, 液晶数字清晰显示温度
- 靠背可选
- 无氟环保制冷剂
- All stainless steel construction
- European compressor and efficient refrigeration unit
- Internalized copper tube, fungi-proofing and energy-saving
- Removable door seal for easier cleaning
- High quality digital controller and independent power switch
- Optional backsplash
- CFC& HCFC free, environmental friendly



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
SLLZ4-1200	1200×700×800mm (H) 1200×760×850mm (H)	210L	2~8°C	270W	R134A	220V~240V/50Hz
SLLD4-1200	1200×700×800mm (H) 1200×760×850mm (H)	210L	-18°C	368W	R404A	220V~240V/50Hz
SLLZ4-1500	1500×700×800mm (H) 1500×760×850mm (H)	308L	2~8°C	270W	R134A	220V~240V/50Hz
SLLD4-1500	1500×700×800mm (H) 1500×760×850mm (H)	308L	-18°C	368W	R404A	220V~240V/50Hz
SLLZ4-1800	1800×700×800mm (H) 1800×760×850mm (H)	390L	2~8°C	288W	R134A	220V~240V/50Hz
SLLD4-1800	1800×700×800mm (H) 1800×760×850mm (H)	390L	-18°C	432W	R404A	220V~240V/50Hz

工程款风冷系列
P style ventilated series



SLLZ4-450F
SLLD4-450F




SLLZ4-1000F
SLLD4-1000F



SLLZ4-1600F
SLLD4-1600F

产品特点/ FEATURES

- 循环风流, 快速制冷, 柜内温度均匀
- 门封内埋电热丝, 减少凝露
- 拉手可选
- 内胆圆弧角位设计, 可彻底清除食物残渣, 杜绝细菌滋生, 符合卫生标准
- 小于90°角门自动回归
- 高精度电子温控, 液晶数字清晰显示温度
- 无氟环保制冷剂
- Circulating air assures rapid cooling and even temperature
- Heating wire inside door seal to defrost
- Optional handles
- Rounded internal corners for hygiene&easy cleaning
- Autoregressive door
- High quality digital controller and independent power switch
- CFC& HCFC free, environmental friendly

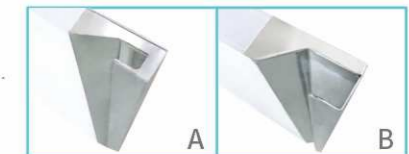

Optional handle style
可选把手款式



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
SLLZ4-450F	625×750×2040mm(H)	450L	2~8°C	441W	R134A	220V~240V/50Hz
SLLD4-450F	625×750×2040mm(H)	450L	-18°C	624W	R404A	220V~240V/50Hz
SLLZ4-1000F	1250×750×2040mm(H)	1000L	2~8°C	550W	R134A	220V~240V/50Hz
SLLD4-1000F	1250×750×2040mm(H)	1000L	-18°C	751W	R404A	220V~240V/50Hz
SLLZ4-1600F	1880×750×2040mm(H)	1600L	2~8°C	800W	R134A	220V~240V/50Hz
SLLD4-1600F	1880×750×2040mm(H)	1600L	-18°C	1040W	R404A	220V~240V/50Hz



SLLZ4-420B
SLLD4-420B

产品特点/ FEATURES

- 循环风流, 快速制冷, 柜内温度均匀
- 高精度电子温控, 液晶数字清晰显示温度
- 无氟环保制冷剂
- Circulating air assures rapid cooling and even temperature
- High quality digital controller and independent power switch
- CFC& HCFC free, environmental friendly



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
SLLZ4-420B	1880×760×800mm(H)	420L	2~8°C	385W	R134A	220V~240V/50Hz
SLLD4-420B	1880×760×800mm(H)	420L	-18°C	310W	R404A	220V~240V/50Hz



SLLZ4-1200L2
SLLD4-1200L2
SLLZ4-1500L2
SLLD4-1500L2



SLLZ4-1800L3
SLLD4-1800L3

产品特点/ FEATURES

- 循环风流, 快速制冷, 柜内温度均匀
- 门封内埋电热丝, 减少凝露
- 拉手可选
- 内胆圆弧角位设计, 可彻底清除食物残渣, 杜绝细菌滋生, 符合卫生标准
- 小于90°角门自动回归
- 高精度电子温控, 液晶数字清晰显示温度
- 无氟环保制冷剂
- Circulating air assures rapid cooling and even temperature
- Heating wire inside door seal to defrost
- Optional handles
- Rounded internal corners for hygiene&easy cleaning
- Autoregressive door
- High quality digital controller and independent power switch
- CFC& HCFC free, environmental friendly



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
SLLZ4-1200L2	1500×750×850mm(H)	210L	2~8°C	370W	R134A	220V~240V/50Hz
SLLD4-1200L2	1500×750×850mm(H)	210L	-18°C	468W	R404A	220V~240V/50Hz
SLLZ4-1500L2	1800×750×850mm(H)	308L	2~8°C	370W	R134A	220V~240V/50Hz
SLLD4-1500L2	1800×750×850mm(H)	308L	-18°C	468W	R404A	220V~240V/50Hz
SLLZ4-1800L3	1200×750×850mm(H)	390L	2~8°C	388W	R134A	220V~240V/50Hz
SLLD4-1800L3	1200×750×850mm(H)	390L	-18°C	532W	R404A	220V~240V/50Hz

展示柜系列
Display cabinet series



桌面式展示柜
Desktop display series



GDF500D



GDF1000D



SCDF-090
SCDF-120

产品特点/ FEATURES

- 循环风流, 快速制冷, 柜内温度均匀
- 优质三层中空除雾玻璃门, 陈列效果更佳
- 顶式灯箱设计, 增加广告效果白色彩钢板, 时尚美观
- 高精度电子温控, 液晶数字清晰显示温度, 独立电源开关设计
- 无氟环保制冷剂
- Circulating air assures rapid cooling and even temperature
- Triple glazed glass door with heating wire to defrost
- Lighting canopy on the top
- White color coated steel design, clean and smart
- High quality digital controller and independent power switch
- CFC& HCFC free, environmental friendly



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
GDF500D	625×745×2040mm(H)	460L	2~8°C	750W	R404A	220V~240V/50Hz
GDF1000D	1250×745×2040mm(H)	980L	-18°C	1150W	R404A	220V~240V/50Hz

产品特点/ FEATURES

- 平面直角电热除雾中空玻璃, 晶莹透亮, 展示效果佳
- 超温双层保护功能, 使用安全放心
- 高精度电子温控, 液晶数字清晰显示温度, 独立电源开关设计
- 倾斜式层架可自由调节, 每层设置安全防护一体节能日光灯
- 进口压缩机及风扇
- 双电机冷凝器, 散热效果更佳
- Beautiful and transparent square glass with defrost feature
- Double temperature protection controller
- Adjustable temperature, high quality digital controller
- Leaned and movable shelves
- European compressor and cooling fan
- Dual fan motor to assure better condensing effect



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
SCDF-090	900×535×830mm(H)	130L	2~8°C	360W	R134A	220V~240V/50Hz
SCDF-120	1200×535×830mm(H)	185L	-18°C	360W	R134A	220V~240V/50Hz



VRX3-1200
VRX3-1500
VRX3-1800



VRX3-1200
VRX3-1500
VRX3-1800

产品特点/ FEATURES

- 高质量铜管
- 左右机组可选
- 四面玻璃设计,完美展示效果
- Hight quality copper tube
- Left or right refrigeration unit is upon your decide
- Four side glasses offer the best view of food



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
VRX3-1200	1200×395×430mm	40L	2~8°C	230W	R134A	220V~240V/50Hz
VRX3-1500	1500×395×430mm	50L	2~8°C	230W	R134A	220V~240V/50Hz
VRX3-1800	1800×395×430mm	60L	2~8°C	280W	R134A	220V~240V/50Hz



SCLG4-210



SCLG4-150
SCLG4-180

产品特点/ FEATURES

- 高质量铜管
- 左右机组可选
- 弧形玻璃设计,完美展示效果
- Hight quality copper tube
- Left or right refrigeration unit is upon your decide
- Curved glass offer the best view of food



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
SCLG4-150	1500×300×295mm	58L	5~15°C	120W	R134A	220V~240V/50Hz
SCLG4-180	1800×300×295mm	74L	5~15°C	135W	R134A	220V~240V/50Hz
SCLG4-210	2100×300×295mm	90L	5~15°C	150W	R134A	220V~240V/50Hz

巧克力柜
Chocolate cabinet



CH-090VM
CH-120VM
CH-150VM
CH-180VM

CH-090VM(1100)H
CH-120VM(1100)H
CH-150VM(1100)H
CH-180VM(1100)H

产品特点/ FEATURES

- 精选天然大理石面板,高贵典雅,寿命长,易清洗,多种颜色可选
- 优质玻璃通透晶莹,水晶般的质感提供最佳视觉效果
- 高精度电子温控,液晶数字清晰显示温度
- 自动除雾功能
- 每层设置安全防护一体节能LED灯
- Bright shiny natural marble plate offers long-life service, optional kinds of colors
- High quality crystal glass offering stunning view of showcase all around
- High quality digital controller and independent power switch
- Automatic defrost system
- Energy-saving LED light under each shelf.



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
CH-090VM	900×800×950/1100mm(H)	147L 257L	2~8°C	544W	R134A	220V~240V/50Hz
CH-120VM	1200×800×950/1100mm(H)	200L 360L	2~8°C	670W	R134A	220V~240V/50Hz
CH-150VM	1500×800×950/1100mm(H)	258L 468L	2~8°C	831W	R134A	220V~240V/50Hz
CH-180VM	1800×800×950/1100mm(H)	313L 573L	2~8°C	1095W	R404A	220V~240V/50Hz

蛋糕展示柜系列
Cake display case series



SL830 SL850
SL840 SL860



SL830V SL860V
SL840V SL880V
SL850V

产品特点/ FEATURES

- 新款大弧度玻璃设计,拥有完美展示效果,晶莹透亮
- 循环风流,快速制冷,柜内温度均匀
- 倾斜式层架可自由调节,每层设置安全防护一体节能LED灯
- 高精电子控温,液晶数字清晰显示温度
- 进口压缩机及风扇
- 双电机冷凝器,散热效果更佳
- Newly designed glass with large artistic arc improved brightness and product demonstration
- Circulating air assures rapid cooling and even temperature
- Leaned and movable shelves,energy-saving LED light under each shelf
- High quality digital controller and independent power switch
- European compressor and cooling fan
- Dual fan motor to assure better condensing effect



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
SL830	900x740x1350mm(H)	380L	2~8°C	600W	R134A	220V~240V/50Hz
SL840	1200x740x1350mm(H)	520L	2~8°C	710W	R134A	220V~240V/50Hz
SL850	1500x740x1350mm(H)	660L	2~8°C	835W	R134A	220V~240V/50Hz
SL860	1800x740x1350mm(H)	800L	2~8°C	1270W	R404A	220V~240V/50Hz
SL830V	900x740x1350mm(H)	400L	2~8°C	544W	R134A	220V~240V/50Hz
SL840V	1200x740x1350mm(H)	550L	2~8°C	664W	R134A	220V~240V/50Hz
SL850V	1500x740x1350mm(H)	700L	2~8°C	817W	R134A	220V~240V/50Hz
SL860V	1800x740x1350mm(H)	850L	2~8°C	1023W	R404A	220V~240V/50Hz
SL880V	2400x740x1350mm(H)	1160L	2~8°C	1520W	R404A	220V~240V/50Hz



SG090FA-3XB SG180FA-3XB
SG120FA-3XB SG200FA-3XB
SG150FA-3XB

CG090FA-2XB
CG120FA-2XB
CG150FA-2XB
CG180FA-2XB

H-SL830 H-SL850
H-SL840 H-SL860

H-SL830V H-SL860V
H-SL840V H-SL870V
H-SL850V H-SL880V

产品特点/ FEATURES

- 电热除雾中空玻璃, 晶莹透亮, 展示效果佳
- 温度自由调节, 高精电子控温, 液晶数字清晰显示温度
- 倾斜式层架可自由调节, 每层设置安全防护一体节能日光灯
- 进口压缩机及风扇
- 双电机冷凝器, 散热效果更佳
- Beautiful and transparent glass with defrost feature
- Double temperature protection controller
- Adjustable temperature, high quality digital controller
- Leaned and movable shelves
- European compressor and cooling fan
- Dual fan motor to assure better condensing effect



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
SG090FA-3XB	900x700x1250mm(H)	390L	2~8°C	544W	R134A	220V~240V/50Hz
SG120FA-3XB	1200x700x1250mm(H)	540L	2~8°C	716W	R134A	220V~240V/50Hz
SG150FA-3XB	1500x700x1250mm(H)	680L	2~8°C	825W	R134A	220V~240V/50Hz
SG180FA-3XB	1800x700x1250mm(H)	830L	2~8°C	1120W	R404A	220V~240V/50Hz
SG200FA-3XB	2000x700x1250mm(H)	930L	2~8°C	1358W	R404A	220V~240V/50Hz
CG090FA-2XB	900x700x1250mm(H)	390L	2~8°C	544W	R134A	220V~240V/50Hz
CG120FA-2XB	1200x700x1250mm(H)	540L	2~8°C	670W	R134A	220V~240V/50Hz
CG150FA-2XB	1500x700x1250mm(H)	680L	2~8°C	831W	R134A	220V~240V/50Hz
CG180FA-2XB	1800x700x1250mm(H)	830L	2~8°C	1095W	R404A	220V~240V/50Hz

产品特点/ FEATURES(热)

- 超温双重保护功能, 使用安全放心
- 温度自由调节
- 全不锈钢网架
- 独立的灯罩防爆设计
- Double temperature protection controller
- Adjustable temperature
- Full stainless steel net shelves
- Anti-explosion lamp



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	电压频率 Voltage
H-SL830	900x740x1350mm(H)	380L	35~85°C	1126W	220V~240V/50Hz
H-SL840	1200x740x1350mm(H)	520L	35~85°C	1290W	220V~240V/50Hz
H-SL850	1500x740x1350mm(H)	660L	35~85°C	1525W	220V~240V/50Hz
H-SL860	1800x740x1350mm(H)	800L	35~85°C	1860W	220V~240V/50Hz
H-SL830V	900x740x1350mm(H)	400L	35~85°C	1126W	220V~240V/50Hz
H-SL840V	1200x740x1350mm(H)	550L	35~85°C	1290W	220V~240V/50Hz
H-SL850V	1500x740x1350mm(H)	700L	35~85°C	1525W	220V~240V/50Hz
H-SL860V	1800x740x1350mm(H)	850L	35~85°C	1860W	220V~240V/50Hz
H-SL870V	2000x740x1350mm(H)	960L	35~85°C	1960W	220V~240V/50Hz
H-SL880V	2400x740x1350mm(H)	1160L	35~85°C	2230W	220V~240V/50Hz



SG090FE-3XB SG180FE-3XB
SG120FE-3XB SG200FE-3XB
SG150FE-3XB

CG090FE-2XB
CG120FE-2XB
CG150FE-2XB
CG180FE-2XB

产品特点/ FEATURES (热)

- 超温双重保护功能, 使用安全放心
- Double temperature protection controller
- 独立的灯罩防爆设计
- Adjustable temperature
- 温度自由调节
- Full stainless steel net shelves
- 全不锈钢网架
- Anti-explosion lamp



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	电压频率 Voltage
SG090FE-3XB	900x700x1250mm(H)	400L	35~85	830W	220V~240V/50Hz
SG120FE-3XB	1200x700x1250mm(H)	550L	35~85	1050W	220V~240V/50Hz
SG150FE-3XB	1500x700x1250mm(H)	700L	35~85	1130W	220V~240V/50Hz
SG180FE-3XB	1800x700x1250mm(H)	850L	35~85	1290W	220V~240V/50Hz
SG200FE-3XB	2000x700x1250mm(H)	960L	35~85	1130W	220V~240V/50Hz
CG090FE-2XB	900x700x1250mm(H)	380L	35~85	830W	220V~240V/50Hz
CG120FE-2XB	1200x700x1250mm(H)	520L	35~85	1050W	220V~240V/50Hz
CG150FE-2XB	1500x700x1250mm(H)	660L	35~85	1130W	220V~240V/50Hz
CG180FE-2XB	1800x700x1250mm(H)	800L	35~85	1290W	220V~240V/50Hz



GG090FA-M
GG120FA-M
GG150FE-M
GG180FE-M



SG090FA-M
SG120FA-M
SG150FA-M
SG180FA-M

产品特点/ FEATURES

- 精选天然大理石面板, 高贵典雅, 寿命长, 易清洗, 多种颜色可选
- Bright shiny natural marble plate offers long-life service, optional kinds of colors
- 优质玻璃通透透亮, 水晶般的质感提供最佳视觉效果
- High quality crystal glass offering stunning view of showcase All around
- 高精度电子温控, 液晶数字清晰显示温度
- High quality digital controller and independent power switch
- 自动除雾功能
- Automatic defrost system
- 每层设置安全防护一体节能LED灯
- Energy-saving LED light under each shelf.



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
GG090FA-M	900x700x1250mm(H)	205L	2~8°C	600W	R134A	220V~240V/50Hz
GG120FA-M	1200x700x1250mm(H)	330L	2~8°C	670W	R134A	220V~240V/50Hz
GG150FA-M	1500x700x1250mm(H)	400L	2~8°C	1070W	R134A	220V~240V/50Hz
GG180FA-M	1800x700x1250mm(H)	500L	2~8°C	1280W	R404A	220V~240V/50Hz
SG090FA-M	900x700x1250mm(H)	340L	2~8°C	790W	R134A	220V~240V/50Hz
SG120FA-M	1200x700x1250mm(H)	470L	2~8°C	930W	R134A	220V~240V/50Hz
SG150FA-M	1500x700x1250mm(H)	600L	2~8°C	1050W	R134A	220V~240V/50Hz
SG180FA-M	1800x700x1250mm(H)	730L	2~8°C	1240W	R404A	220V~240V/50Hz



SLP830C SLP860C
SLP840C SLP870C
SLP850C SLP880C



H-SLP830C
H-SLP840C



CG150FA/FE-2XB
CG180FA/FE-2XB

SLOP850FA-3XB
SLOP860FA-3XB



产品特点/ FEATURES

- 新款斜面玻璃设计,拥有完美展示效果,晶莹透亮
- 超低身制冷机组,高深度玻璃增大展示面积,柜内产品吸引力突出
- 循环风流,快速制冷,柜内温度均匀
- 倾斜式层架可自由调节,每层设置安全防护一体节能LED灯
- 高精电子控温,液晶数字清晰显示温度
- 进口压缩机及风扇
- 双电机冷凝器,散热效果更佳
- Newly designed glass to improve brightness and product demonstration
- Lowered refrigeration unit with increased display area and volume maximized the retail attractiveness
- Circulating air assures rapid cooling and even temperature
- Leaned and movable shelves,energy-saving LED light under each shelf
- High quality digital controller and independent power switch
- European compressor and cooling fan
- Dual fan motor to assure better condensing effect

型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
H-SLP830C	900x800x1350mm(H)	400L	35~85°C	1103W	/	220V~240V/50Hz
H-SLP840C	1200x800x1350mm(H)	550L	35~85°C	1288W	/	220V~240V/50Hz
SLP830C	900x800x1350mm(H)	400L	2~8°C	825W	R404A	220V~240V/50Hz
SLP840C	1200x800x1350mm(H)	550L	2~8°C	995W	R404A	220V~240V/50Hz
SLP850C	1500x800x1350mm(H)	700L	2~8°C	1099W	R404A	220V~240V/50Hz
SLP860C	1800x800x1350mm(H)	850L	2~8°C	1342W	R404A	220V~240V/50Hz
SLP870C	2000x800x1350mm(H)	960L	2~8°C	1297W	R404A	220V~240V/50Hz
SLP880C	2400x800x1350mm(H)	1160L	2~8°C	1365W	R404A	220V~240V/50Hz

产品特点/ FEATURES(热)

- 超温双重保护功能,使用安全放心
- 温度自由调节
- 全不锈钢网架
- 独立的灯罩防爆设计
- Double temperature protection controller
- Adjustable temperature
- Full stainless steel net shelves
- Anti-explosion lamp



产品特点/ FEATURES

- 大圆弧中空玻璃,晶莹透亮,展示效果佳
- 循环风流,快速制冷,柜内温度均匀
- 倾斜式层架可自由调节,每层设置安全防护一体节能日光灯
- 高精度电子控温,液晶数字清晰显示
- 进口压缩机及风扇
- Beautiful and transparent arc glass with defrost feature
- Circulating air assures rapid cooling and even temperature
- Leaned and movable shelves, Energy-saving LED light under each shelf
- High quality digital controller and independent power switch
- European compressor and cooling fan

型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
CG150FA/FE-2XB	1500x760x1250mm	430L	2~8/35~85°C	1470W	R404A	220V~240V/50Hz
CG180FA/FE-2XB	1800x760x1250mm	580L	2~8/35~85°C	1570W	R404A	220V~240V/50Hz
SLOP850FA-3XB	1500x760x1350mm	430L	5~10/2~8°C	1870W	R404A	220V~240V/50Hz
SLOP860FA-3XB	1800x760x1350mm	540L	5~10/2~8°C	2170W	R404A	220V~240V/50Hz

产品特点/ FEATURES(热)

- 超温双重保护功能,使用安全放心
- 温度自由调节
- 全不锈钢网架
- 独立的灯罩防爆设计
- Double temperature protection controller
- Adjustable temperature
- Full stainless steel net shelves
- Anti-explosion lamp

PG系列
PG series



PG150FE-Y
PG180FE-Y
PG210FE-Y



PG150FA-Y
PG180FA-Y
PG210FA-Y

产品特点/ FEATURES

- 专业风道设计, 分盘制冷快速均匀
- 移动式有机玻璃滑盖, 保证食物安全卫生
- 前部脚轮带刹车, 移动更方便
- Professional designed air duct for fast and even cooling of GN pans
- Transparent sliding door to guarantee the hygiene of the food
- Caster wheel with brakes



产品特点/ FEATURES(热)

- 超温双重保护功能, 使用安全放心
- 温度自由调节
- 全不锈钢网架
- 独立的灯罩防爆设计
- Double temperature protection controller
- Adjustable temperature
- Full stainless steel net shelves
- Anti-explosion lamp

型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
PG150FE-Y	1460x790x1250mm	600L	35~85°C	2160W	/	220V~240V/50Hz
PG180FE-Y	1860x790x1250mm	800L	35~85°C	2700W	/	220V~240V/50Hz
PG210FE-Y	2160x790x1250mm	1000L	35~85°C	3050W	/	220V~240V/50Hz
PG150FA-Y	1460x790x1250mm	600L	2-8°C	622W	R134A	220V~240V/50Hz
PG180FA-Y	1860x790x1250mm	800L	2-8°C	640W	R134A	220V~240V/50Hz
PG210FA-Y	2160x790x1250mm	1000L	2-8°C	680W	R134A	220V~240V/50Hz

披萨/沙律台
Pizza & Salad bars



PPB/15
PPB/18
PPB/21



SCB/15
SCB/18
SCB/21

产品特点/ FEATURES

- 专业风道设计, 分盘制冷快速均匀
- 移动式有机玻璃滑盖, 保证食物安全卫生
- 可移动式机组, 机组清洗更方便
- 前部脚轮带刹车, 移动更方便
- Professional designed air duct for fast and even cooling of GN pans
- Transparent sliding door to guarantee the hygiene of the food
- Removable refrigeration unit for easier cleaning
- Caster wheel with brakes



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
PPB/15	1480x810x1050mm	550L	2~8°C	460W	R134A	220V~240V/50Hz
PPB/18	1820x810x1050mm	900L	2~8°C	480W	R134A	220V~240V/50Hz
PPB/21	2180x810x1050mm	1050L	2~8°C	624W	R134A	220V~240V/50Hz
SCB/15	1500x700x1150mm	550L	2~8°C	460W	R134A	220V~240V/50Hz
SCB/18	1800x700x1150mm	900L	2~8°C	480W	R134A	220V~240V/50Hz
SCB/21	2100x700x1150mm	1050L	2~8°C	624W	R134A	220V~240V/50Hz

保温汤池系列
Bain marie show case



BM11SD
BM14SD
BM17SD



BM11TD
BM14TD
BM17TD



产品特点/ FEATURES

- 全304不锈钢, 外形美观, 永不生锈
- 全钢化玻璃, 保证安全
- 温度达到35~85, 保持食物新鲜
- 可选进口发热管或组装式发热管, 温度均匀
- 无支柱, 360度可视
- 304 Stainless Steel
- Toughened Glass on All Sides for Maximum Safety
- Mechanical Thermostat Temperature Control—Heated: 35 to 85°C
- Multiple Element Design for Reliable Operation and Even Temperature
- Optimum Visibility of Product - No Unsightly Corner Post to Front
- Hot Food Holding Cabinets Only, Not Designed to Heat Product



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	电压频率 Voltage
BM11SD	1060X630X700mm	222L	35~85°C	1882W	220V~240V/50Hz
BM14SD	1400X630X700mm	302L	35~85°C	2589W	220V~240V/50Hz
BM17SD	1750X630X700mm	376L	35~85°C	3305W	220V~240V/50Hz
BM11TD	1060X630X700mm	178L	35~85°C	1882W	220V~240V/50Hz
BM14TD	1400X630X700mm	242L	35~85°C	2589W	220V~240V/50Hz
BM17TD	1750X630X700mm	301L	35~85°C	3305W	220V~240V/50Hz

速冻柜
Blast freezer



XY-D11



XY-D15

产品特点/ FEATURES

- 不锈钢内外箱体, 加厚发泡层, 高效锁冷
- 轻触式智能仪控制面板, 精准控温
- 可调节层架, 适用不同食品摆放
- 短时间内急速制冷降温, 最大程度保存食品新鲜度
- 进口名牌压缩机
- 自动回归门
- 重力脚和脚轮可供选择
- Stainless steel body, high-density & thicker foam layer, good insulation effect
- Touch smart controller, precise temperature
- Adjustable shelving for different kinds of food
- Rapid cooling, keep the food more fresh and nutrition
- Imported compressor
- Autoregressive door
- Option of adjustable feet or casters



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
XY-D11	790×800×1680mm (H)	11盘 或15只冰淇淋桶, 5升 11 600*400 trays or 15 ice cream bin 5lt	-36~-40°C	2590W	R404A	220V/50Hz
XY-D15	790×800×1950mm (H)	15盘 或21只冰淇淋桶, 5升 115 600*400 trays or 21 ice cream bin 5lt	-36~-40°C	3460W	R404A	220V/50Hz

冰淇淋柜
Ice cream cabinet



XY-IC125Z



XY-IC15816
XY-IC19320

产品特点/ FEATURES

- 不锈钢内外箱体,加厚发泡层,高效锁冷
- 循环风流,快速制冷,柜内温度均匀
- 热气化霜,高效快捷,最大程度降低柜内温度波动,避免冰激凌融化
- 三层中空玻璃带发热丝,规避冷量流失问题,展示效果佳
- 进口名牌压缩机
- 调节脚和脚轮可供选择
- Stainless steel body, high-density & thicker foam layer, good insulation effect
- Circulating air assures rapid cooling and even temperature
- Hot gas defrosting, minimize temperature fluctuations
- Triple layer heat glass, good insulation effect & perfect display
- Imported compressor
- Option of adjustable feet or casters




型号 Model	尺寸(mm) Dimensions	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
XY-IC125Z	1250×630×1035mm(H)	-20~-23°C	716W	R404A	220V/50Hz
XY-IC15816	1582×1063×1330mm(H)	-20~-23°C	1092W	R404A	220V/50Hz
XY-IC19320	1934×1063×1330mm(H)	-20~-23°C	1550W	R404A	220V/50Hz

解冻柜
Thawing cabinet



XY-TW500

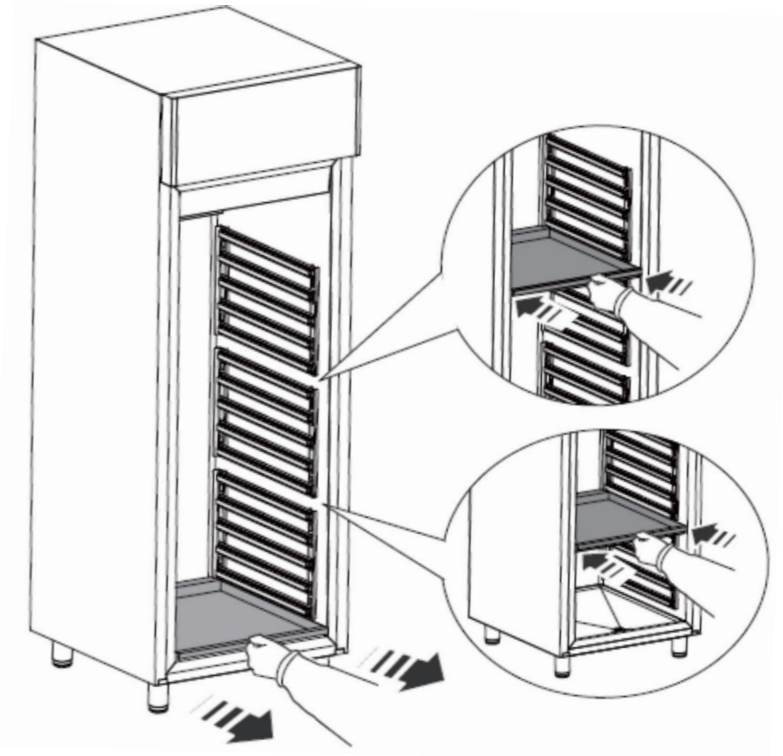

产品特点/ FEATURES

- 全304材质,符合食品接触要求
- 失水率低,最大程度减少蛋白质流失
- 可控低温,抑制微生物生长
- 四段解冻,适合各种肉类品的解冻
- 插盘式托架,方便调节
- 柜内底部放置接水盆,收集融化后的污水,减少柜内滋生细菌,同时解决了部分店铺无法直接排水的问题
- 电磁感应锁,安全耐用
- 风扇磁控开关,减少开门时冷量流失
- 可作为冷藏柜使用,温度0°C~5°C
- All stainless steel 304
- Controlled low temp to prevent bacteria from growing
- Four-stage thawing, suitable for all kinds of meat
- Circulating air assures rapid cooling and even temperature
- Adjustable L-shape tray holder
- Bottom with water tray, clean & hygiene
- Electromagnetic lock, safe & durable
- Fan switch, reduce cold loss when opening the door
- Can use as chiller, temp:0°C~5°C



型号 Model	尺寸(mm) Dimensions	解冻量 Thawing capacity	解冻时间 Thawing time	温度(°C) Temp	运行功率/ 解冻功率(W) Power consumption/ Thawing power	制冷剂 Refrigerant	电压频率 Voltage
XY-TW500	710×825×2100mm(H)	150KGS	8~12hrs /batch	0~5°C	442/1755w	R134A	220V~240V/50Hz

鲜花柜
Flower showcase



定制红酒柜
Custom made wine chiller



XYF-060



XYF-120



XY-RW01
XY-RW02



XY-RW01
XY-RW02

产品特点/ FEATURES

- 黑色不锈钢箱体, 高端大气
- 四面玻璃带除雾, 完美展示效果, 晶莹剔透
- 高精电子控温, 液晶数字清晰显示温度
- 自动除霜功能
- 每层设置安全防护一体节能LED灯
- Black S/S201 body
- Four side heated glass offering stunning view of showcase all around
- High quality digital controller and independent power switch
- Automatic defrost system
- Energy-saving LED light under each shelf.



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
XYF-060	600X600X1800mm	/	2~8°C	500W	R134A	220V~240V/50Hz
XYF-120	1200X600X1800mm	/	2~8°C	950W	R134A	220V~240V/50Hz



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
XY-RW01	1180X530X2400mm	/	5~10°C	980W	R404A	220V/50Hz
XY-RW02	1500X530X2400mm	/	5~10°C	1600W	R404A	220V/50Hz

商超系列
Supermarket series



XY-SD1570
XY-SD2070
XY-SD2570



XY-SZD115



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
XY-SD1570	1570X1070X900mm	440L	-20°C	920W	R404A	220V~240V/50Hz
XY-SD2070	2070X1070X900mm	610L	-20°C	1100W	R404A	220V~240V/50Hz
XY-SD2570	2570X1070X900mm	780L	-20°C	1300W	R404A	220V~240V/50Hz
XY-SZD115	1150X(1000+1870+1000)X850mm	1400L	-18°C	3093W	R404A	220V~240V/50Hz



XY-SZM12



XY-SZM18



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
XY-SZM12	1250X1180X2000mm	400+290L	-23/2°C	1780W	R404A	220V~240V/50Hz
XY-SZM18	1875X1180X2000mm	610+440L	-23/2°C	2740W	R404A	220V~240V/50Hz



XY-SXR12
XY-SXR18



XY-SF090
XY-SF120
XY-SF150



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
XY-SXR12	1250X1180X950mm	290L	2°C	1020W	R404A	220V~240V/50Hz
XY-SXR18	1875X1180X950mm	440L	2°C	1080W	R404A	220V~240V/50Hz



型号 Model	尺寸(mm) Dimensions	容积(L) Capacity	温度(°C) Temp	功率(W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
XY-SF090	900X760X1325mm	310L	2°C	850W	R404A	220V~240V/50Hz
XY-SF120	1200X760X1325mm	410L	2°C	980W	R404A	220V~240V/50Hz
XY-SF150	1500X760X1325mm	520L	2°C	1380W	R404A	220V~240V/50Hz



红酒柜
Wine cooler




XY-S1000D



XY-S1600D



型号 Model	尺寸(mm) Dimensions	容积 (L) Capacity	温度(°C) Temp	功率 (W) Power consumption	制冷剂 Refrigerant	电压频率 Voltage
XY-S500D	625X750X2000mm	420L	-20°C	912W	R404A	220V~240V/50Hz
XY-S1000D	1250X750X2000mm	920L	-20°C	1390W	R404A	220V~240V/50Hz
XY-S1600D	1800X750X2000mm	1430L	-20°C	1765W	R404A	220V~240V/50Hz
XY-S500D	625X750X2000mm	420L	-2°C	722W	R404A	220V~240V/50Hz
XY-S1000D	1250X750X2000mm	920L	-2°C	1090W	R404A	220V~240V/50Hz
XY-S1600D	1800X750X2000mm	1430L	-2°C	1265W	R404A	220V~240V/50Hz

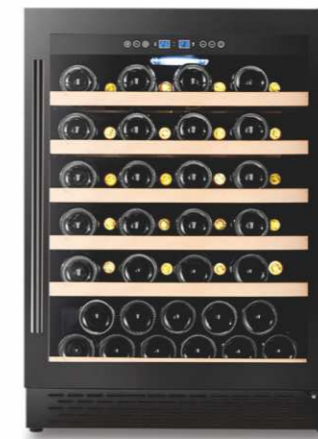

XY-150A



XY-150A



XY-120-2D



XYF-480B



XYF-5102Z



型号 Model	温区 Temperature zone	容积 (L) Capacity	可放瓶数 Bottle capacity (Bordeaux)	制冷剂 Refrigerant	温度范围 Temperature range	尺寸(mm) Dimensions
XY-150A	Single 单温	143L	46 bottles	R600a	5-18°C (41-65°F)	595X575X820/870mm
XY-120-2D	Dual 双温	120L	36bottles	R600a	5-22°C (41-72°F)	595X575X820/870mm
XY-480B	Dual 双温	393L	154bottles	R600a	5-13°C (41-55°F)	598X680X1700mm
XYF-5102Z	Dual 双温	450L	108bottles	R600a	5-22°C (41-72°F)	598X685X1960mm

制冰机
Ice machine



XY-120



XY-1000P



XY-35C



XY-120P



XY-210



XY-280M



XY-320M

型号 Model	尺寸(mm) Dimensions	冰型 Ice model	制冰量(磅) Output(lb/24hr)	储冰量(磅) Bin Capacity (lb)	功率(W) power	制冷剂 refrigerant	电压频率 Power
XY-120	500X590X853mm(H)	Cube	120 lb=55 kg	40lb=18kg	460W	R290	220V~240V/50Hz
XY-120P	500X590X853mm(H)	Cube	120 lb=55 kg	40lb=18kg	460W	R290	220V~240V/50Hz
XY-210	660X707X919mm(H)	Cube	210 lb=95 kg	80lb=36kg	625W	R290	220V~240V/50Hz
XY-1000P	760X832X1890mm(H)	Cube	1000 lb=455 kg	275lb=125kg	2400W	R290	220V~240V/50Hz

型号 Model	尺寸(mm) Dimensions	冰型 Ice model	制冰量(磅) Output(lb/24hr)	储冰量(磅) Bin Capacity (lb)	功率(W) power	制冷剂 refrigerant	电压频率 Power
XY-35C	375X553X762(H)	Bullet	77lb=35KG	33lb=15kgs	350W	R290	220V~240V/50Hz
XY-280M	650X651X1063(H)	Crescent	280lb=127KG	88lb=40KG	780W	R290	220V~240V/50Hz
XY-320M	560X830X1897(H)	Crescent	320lb=145KG	275lb=125KG	780W	R290	220V~240V/50Hz

COOPERATIVES

合作企业

 麦当劳	 肯德基	 真功夫	 香港paisano's pizzeria
 汉堡王	 吉野家	 珠海新海利大酒楼	 喜茶
 马得利	 宜家家居	 喜来登	 金钱豹
 上海世博会	 中山市卫生局	 假日酒店	 8号码头

PRODUCT APPLICATION CASES

产品应用案例



产品保温参考

Product insulation reference

 水果 2~8°C	 饮料 2~8°C	 蛋糕 2~8°C
 面包 30~38°C	 日料 8~12°C	 鲜肉 -10~0°C
 红酒 10~15°C	 冰淇淋 -5~-20°C	 熟食 30~38°C